

## MTSRHC49S2P3R57M SMD CRYSTAL - HC49S2P Size



### Features

- Suitable for reflow soldering
- Tight tolerance and stability available
- Seam sealed package assures high reliability
- Operating Temperature Range: -40 °C ~ 85 °C

### Product Image




\*Displayed image is only for reference purpose, original product may vary.

### Applications

- High density applications
- Embedded systems design
- PMCIA, Wireless applications
- Modems, communication and test equipment

### Dimensions

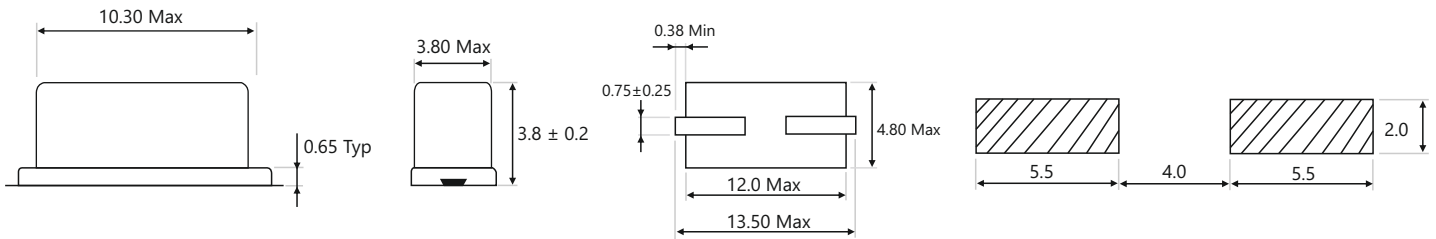

All Dimensions in mm

### Electrical Specifications

Specifications	HC-49S	Conditions
Frequency Range	3.579545 MHz (Fund.)	
Frequency Tolerance	± 20 ppm	at 25°C
Frequency Tol. Over Temperature	± 30 ppm	-10~+60°C
Operating Temperature Range	-20°C ~ +70°C	
Storage Temperature Range	-40°C ~ +85°C	
Series Resistance	150 Ω (Max.)	at 25°C
Load Capacitance	20 pF	Need to specify
Shunt Capacitance	7.0 pF (Max.)	
Drive Level	100 μw (Max.)	
Aging	± 5 ppm (Max.)	25 ± 3°C
Insulation Resistance	500 MΩ (Min.)	DC 100 V ± 15 V

**NOTE:**

This land pattern is for reference purposes only. Consult your manufacturing group to ensure your company's manufacturing guidelines are met. Magno Teknik owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of Magno Teknik's product/patent coverage may be accessed at [www.magnoteknik.com](http://www.magnoteknik.com). Magno Teknik reserves the right to make changes without further notice to any products herein. Magno Teknik makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Magno Teknik assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using Magno Teknik products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by Magno Teknik. "Typical" parameters which may be provided in Magno Teknik data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Magno Teknik does not convey any license under its patent rights nor the rights of others. Magno Teknik products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use Magno Teknik products for any such unintended or unauthorized application, Buyer shall indemnify and hold Magno Teknik and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Magno Teknik was negligent regarding the design or manufacture of the part. Magno Teknik is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.